FARRIER NEWS

CELEBRATING AMERICA 250 YEARS

NOVEMBER 2026

FIND AN FPD DEALER NEAR YOU AT FARRIERPRODUCTS.COM/LOCATIONS

Featured Products

Kerckhaert SX-7 and SX-8:
When Time is Money, These Shoes Deliver





The Kerckhaert SX-7 is a lightweight, 7mm thick, front and hind pattern shoe – designed for efficiency. The Kerckhaert SX-8 delivers dependable general-purpose performance in a 5/16" thick front and hind pattern. Both styles are easily modified to fit a variety of disciplines, saving the farrier time at the anvil without sacrificing versatility.

Save Edge Original Rasp:
Proudly Made in the USA


The popular Save Edge Original Rasp is available at an FPD Dealer near you. Made in the U.S., the Original Rasp is known for having a smooth, yet aggressive, cutting action. Due to the superior tooth design and precision sharpening process, the 14" Original Rasp has been the industry standard with farriers since its launch.



JUST A REMINDER



New! Liberty 4.5 Reiner Special Nail

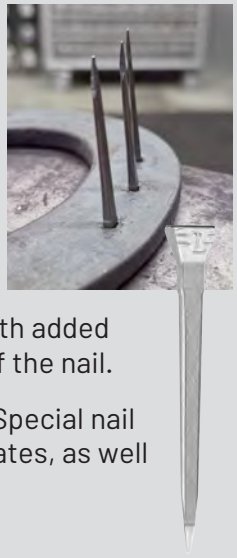

The new Liberty Reiner Special nail is designed to fit securely in sliding plates. The head fits almost flush; requiring very little rasping to make it flush with the shoe. This nail provides a secure fit with added material in the throat of the nail.

The Liberty 4.5 Reiner Special nail fits securely in Pride plates, as well as race plates and the Standardbred swedge.


USING THE FOOTPRO DOUBLE SIDED BENCH GRINDER DISC





If you do a lot of heel check grinds this is the attachment for you. It is also useful for notching pads for clips, beveling the inside web of shoes and touch up of clips. It has a 40-grit Ceramic abrasive that does an excellent and efficient job and is long lasting.

A couple quick notes important to mounting the disc properly. It has a 5/8" arbor so it fits perfectly on grinder shafts of 5/8". **However, you need a spacer to keep it far enough from the housing to be able to tighten. That spacer will be ¾-1" long for most grinders.** Most importantly, it is directional, meaning you can only mount it properly going in one direction. There is an arrow on the label indicating the direction and it should match the direction your grinder shaft is turning. Be sure you check this before using it. If it is mounted in the wrong direction the disc will not work and will be damaged very quickly.

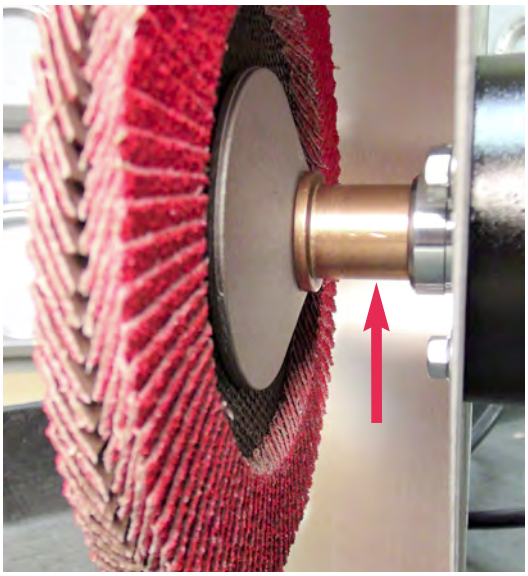

3/4"x1" spacer required.



Mount in right direction.



Ready to work.